

Computer Science

Jerzy Świątek

Systems Modelling and Analysis

Choose yourself and new technologies


L.14. Selected problems of complex systems modeling



Project co-financed from the EU European Social Fund




Identification Task

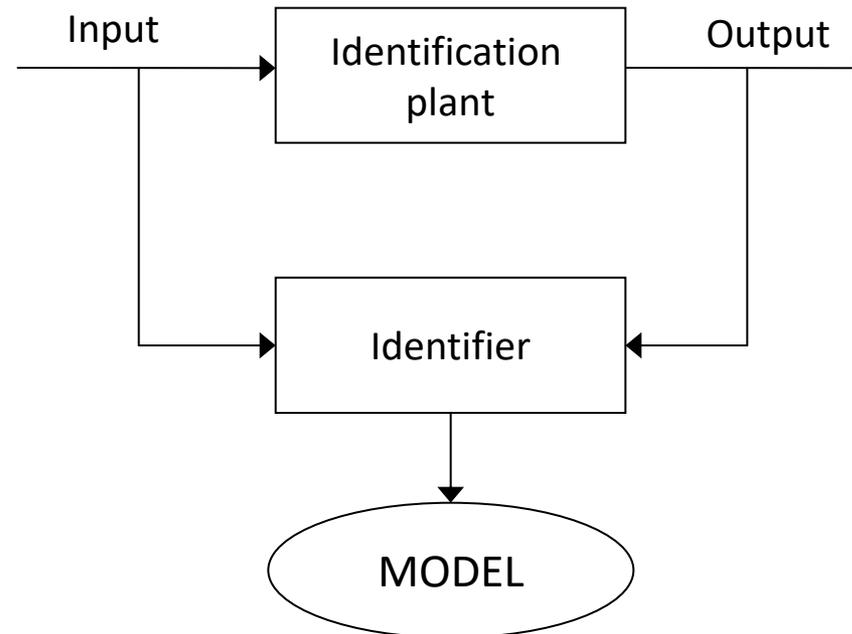



Plant in the class of model

Deterministyczny

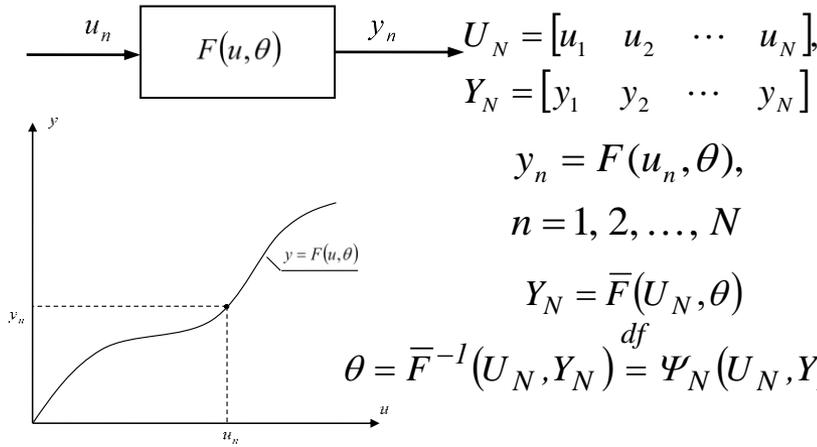


$$y_n = F(u_n, \theta),$$

$$n = 1, 2, \dots, N$$

$$Y_N = \bar{F}(U_N, \theta)$$

$$\theta = \bar{F}^{-1}(U_N, Y_N) \stackrel{df}{=} \Psi_N(U_N, Y_N)$$

Choice of the best model

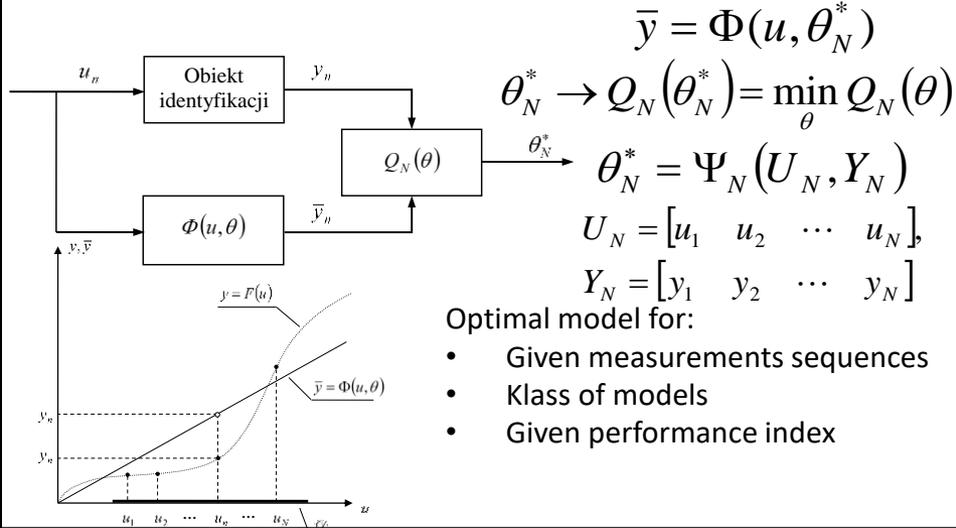

$$\bar{y} = \Phi(u, \theta_N^*)$$

$$\theta_N^* \rightarrow Q_N(\theta_N^*) = \min_{\theta} Q_N(\theta)$$


$$\theta_N^* = \Psi_N(U_N, Y_N)$$

$$U_N = [u_1 \ u_2 \ \dots \ u_N]$$

$$Y_N = [y_1 \ y_2 \ \dots \ y_N]$$


- Optimal model for:
- Given measurements sequences
 - Class of models
 - Given performance index

Losowy

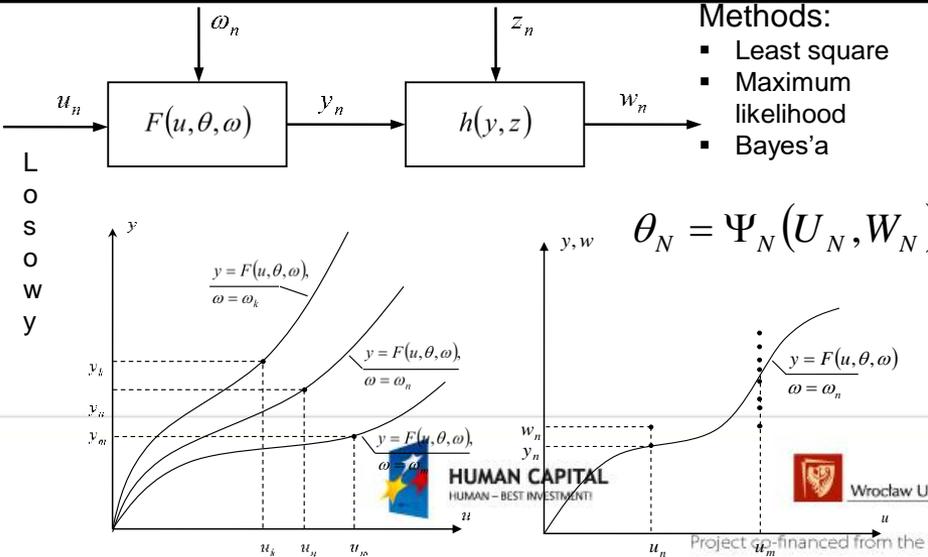

- Methods:
- Least square
 - Maximum likelihood
 - Bayes'a

$$\theta_N = \Psi_N(U_N, W_N)$$

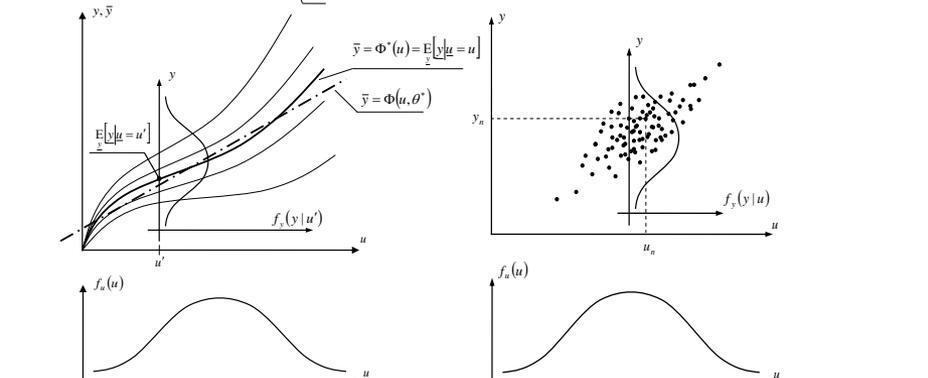


Full probabilistic knowledge Unknown probabilistic knowledge

- First type regression
- Second type regression
- Performance index estimation
- Parameter estimation of the probability distribution
- Probabilist distribution estimatoin





Complex systems description

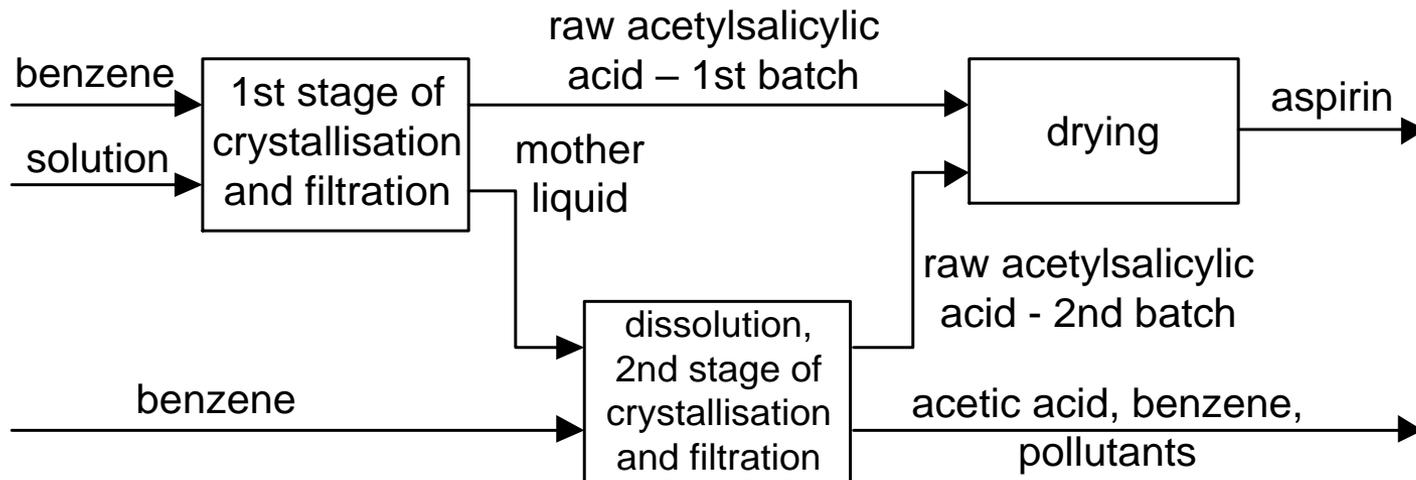

Complex system of chemical nature




New problems

- Complex systems description
- Identification with restricted measurements possibilities
- Local and global identification problem
- Multistage identification



Complex systems description

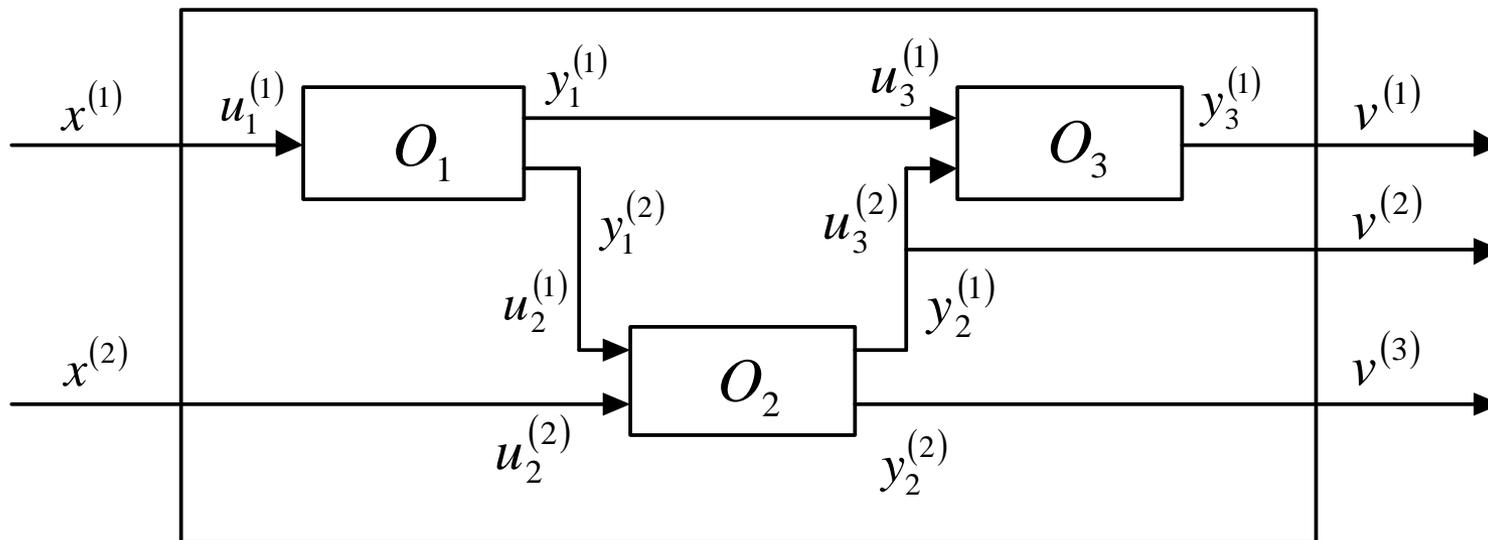

Example of complex system



Complex systems description

Complex input output system with M elementary subsystems O_1, O_2, \dots, O_M .

$$y_m = F_m(u_m)$$

Characteristic of the m -th subsystem, input u_m and output y_m , F_m is a known function.

$$u_m = \begin{bmatrix} u_m^{(1)} \\ u_m^{(2)} \\ \vdots \\ u_m^{(S_m)} \end{bmatrix} \in \mathcal{U}_m \subseteq \mathcal{R}^{S_m}, \quad y_m = \begin{bmatrix} y_m^{(1)} \\ y_m^{(2)} \\ \vdots \\ y_m^{(L_m)} \end{bmatrix} \in \mathcal{Y}_m \subseteq \mathcal{R}^{L_m}, \quad m=1, 2, \dots, M.$$

where: S_m and L_m are dimensions of the input and output spaces,



Complex systems description

Let u, y , denote vectors of all inputs and outputs in the complex plant:

$$u = \begin{bmatrix} u^{(1)} \\ u^{(2)} \\ \vdots \\ u^{(S)} \end{bmatrix} \stackrel{df}{=} \begin{bmatrix} u_1 \\ u_2 \\ \vdots \\ u_M \end{bmatrix}, \quad y = \begin{bmatrix} y^{(1)} \\ y^{(2)} \\ \vdots \\ y^{(L)} \end{bmatrix} \stackrel{df}{=} \begin{bmatrix} y_1 \\ y_2 \\ \vdots \\ y_M \end{bmatrix} \quad x = \begin{bmatrix} x^{(1)} \\ x^{(2)} \\ \vdots \\ x^{(\tilde{S})} \end{bmatrix}$$

where vector of all complex system inputs: $u \in \mathcal{U} = \mathcal{U}_1 \times \mathcal{U}_2 \times \dots \times \mathcal{U}_M \subseteq \mathcal{R}^S$, $S = \sum_{m=1}^M S_m$,

vector of all complex system outputs: $y \in \mathcal{Y} = \mathcal{Y}_1 \times \mathcal{Y}_2 \times \dots \times \mathcal{Y}_M \subseteq \mathcal{R}^L$, $L = \sum_{m=1}^M L_m$,

and x is \tilde{S} dimensional external input vector $x \in \mathcal{X} \subseteq \mathcal{U} \subseteq \mathcal{R}^{\tilde{S}}$.



Complex systems description

The structure of the system is given by the relation:

$$u = Ay + Bx ,$$

where: A is $S \times L$ and B is $S \times \tilde{S}$ zero – one matrix.

The matrix A defines the connections between system elements, i.e.:

$$A = [a_{sl}]_{\substack{s=1,2,\dots,S \\ l=1,2,\dots,L}} , \quad a_{sl} = \begin{cases} 1 & \text{if } u^{(s)} = y^{(l)} \\ 0 & \text{if } u^{(s)} \neq y^{(l)} \end{cases} ,$$

and matrix B shows the external inputs, i.e.:

$$B = [b_{s\tilde{s}}]_{\substack{s=1,2,\dots,S \\ \tilde{s}=1,2,\dots,\tilde{S}}} , \quad b_{s\tilde{s}} = \begin{cases} 1 & \text{if } u^{(s)} = x^{(\tilde{s})} \\ 0 & \text{if } u^{(s)} \neq x^{(\tilde{s})} \end{cases} .$$



Complex systems description

External complex system outputs: $v = \begin{bmatrix} v^{(1)} \\ v^{(2)} \\ \vdots \\ v^{(\tilde{L})} \end{bmatrix}.$

\tilde{L} dimensional vector v , distinguished all outputs defined by $\tilde{L} \times L$ matrix C ,
 $v = Cy$,


where

$$C = \left[c_{\tilde{l}l} \right]_{\substack{\tilde{l}=1,2,\dots,\tilde{L} \\ l=1,2,\dots,L}}, \quad c_{\tilde{l}l} = \begin{cases} 1 & \text{if } v^{(\tilde{l})} = y^{(l)} \\ 0 & \text{if } v^{(\tilde{l})} \neq y^{(l)}. \end{cases}$$

The external output vector: $v \in \mathcal{V} = \{v : \forall y \in \mathcal{Y}, v = Cy\} \subseteq \mathcal{R}^{\tilde{L}}.$



Complex systems description

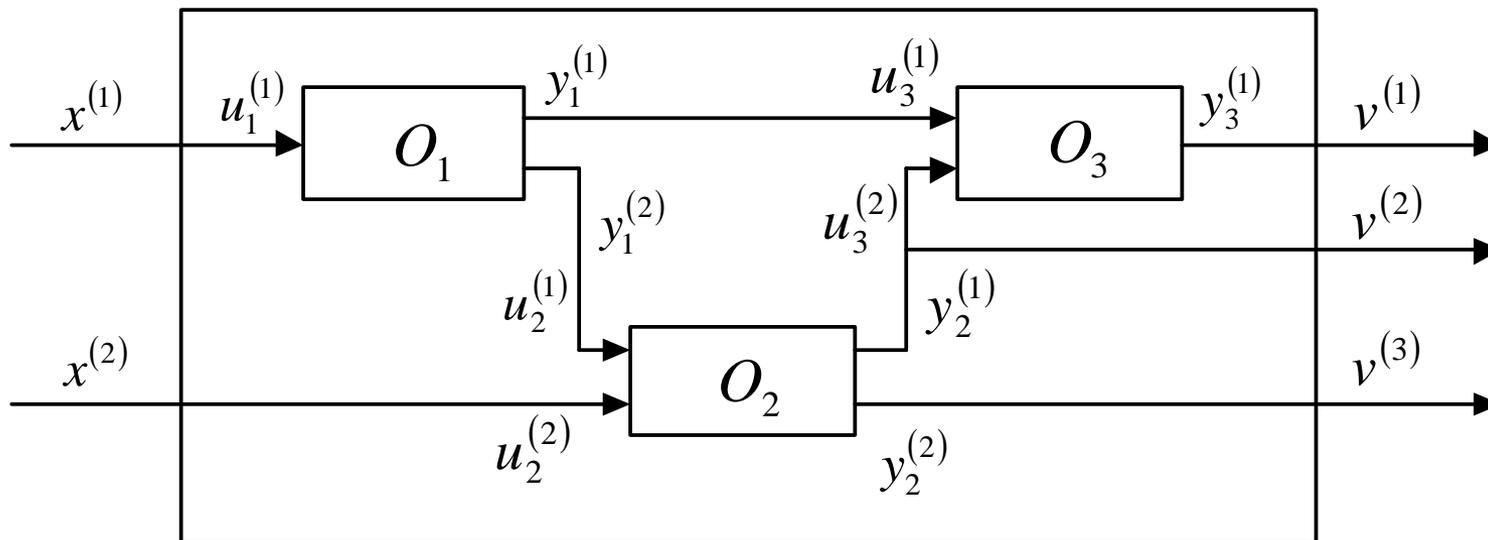

Example of complex system



Complex systems description

$$u = Ay + Bx$$

$$\begin{bmatrix} u_1^{(1)} \\ u_2^{(1)} \\ u_2^{(2)} \\ u_3^{(1)} \\ u_3^{(2)} \end{bmatrix} = \begin{bmatrix} 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 \end{bmatrix} \begin{bmatrix} y_1^{(1)} \\ y_1^{(2)} \\ y_2^{(1)} \\ y_2^{(2)} \\ y_3^{(1)} \end{bmatrix} + \begin{bmatrix} 1 & 0 \\ 0 & 0 \\ 0 & 1 \\ 0 & 0 \\ 0 & 0 \end{bmatrix} \begin{bmatrix} x^{(1)} \\ x^{(2)} \end{bmatrix},$$

$$v = Cy$$

$$\begin{bmatrix} v^{(1)} \\ v^{(2)} \\ v^{(3)} \end{bmatrix} = \begin{bmatrix} 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} y_1^{(1)} \\ y_1^{(2)} \\ y_2^{(1)} \\ y_2^{(2)} \\ y_3^{(1)} \end{bmatrix}.$$



Complex systems description

Let us denote it by: $y = \begin{bmatrix} y_1 \\ y_2 \\ \vdots \\ y_M \end{bmatrix} = \begin{bmatrix} F_1(u_1) \\ F_2(u_2) \\ \vdots \\ F_M(u_M) \end{bmatrix} \stackrel{df}{=} \bar{F}(u).$

$$y = \bar{F}(Ay + Bx).$$

By solving this with respect to y we obtain: $y = \bar{F}^{-1}(x; A, B)$

$$v = C\bar{F}^{-1}(x; A, B) = F(x).$$



Identification of complex systems with restricted measurement possibilities

Let us consider complex system with M elements O_1, O_2, \dots, O_M . The structure of the complex system is given by matrices A and B . Static characteristics are known with accuracy to parameters:

$$y_m = F_m(u_m, \theta_m)$$

u_m and y_m are input and output of m -th elements, F_m is a known function θ_m is R_m -dimensional vector of unknown parameters:


$$\theta_m = \begin{bmatrix} \theta_m^{(1)} \\ \theta_m^{(2)} \\ \vdots \\ \theta_m^{(R_m)} \end{bmatrix} \in \Theta_m \subseteq \mathcal{R}^{R_m}$$

Only external inputs x and outputs v shown by matrix C are measured.

Now a new question appears: Is it possible to uniquely determine plant characteristic parameters based on restricted output measurements?



Complex systems description

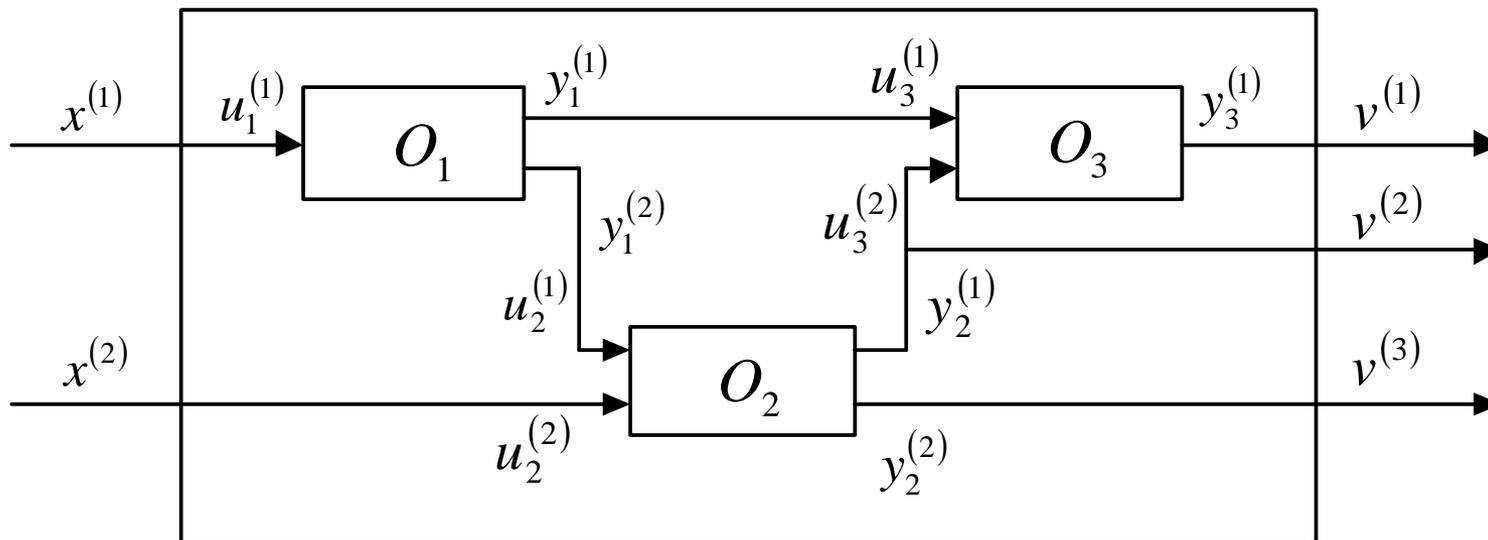


Example of complex system



Identification of complex systems with restricted measurement possibilities

The following examples show the problem.

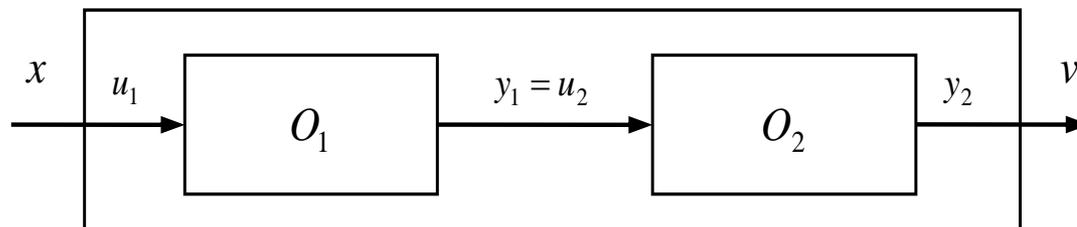

Cascade structure of two elements

For the above case the system description has the form:

$$\begin{bmatrix} u_1 \\ u_2 \end{bmatrix} = \begin{bmatrix} 0 & 0 \\ 1 & 0 \end{bmatrix} \begin{bmatrix} y_1 \\ y_2 \end{bmatrix} + \begin{bmatrix} 1 \\ 0 \end{bmatrix} x = \begin{bmatrix} x \\ y_1 \end{bmatrix}, \quad v = \begin{bmatrix} 0 & I \end{bmatrix} \begin{bmatrix} y_1 \\ y_2 \end{bmatrix} = y_2.$$



Identification of complex systems with restricted measurement possibilities

Example 1 Let static characteristics of the first and second element are:

$$y_1 = u_1^{\theta_1}, \quad y_2 = \theta_2 u_2.$$

The system as a new element has the form: $v = \theta_2 x^{\theta_1} = e^{\theta_1 x + \ln \theta_2}$, where $\theta^T = [\theta_1 \quad \theta_2]$ is a vector of unknown parameters of complex system characteristic.

For external inputs $x_1 > 0, x_2 > 0, x_1 \neq x_2$ outputs v_1 and v_2 were measured ($N = 2$).

Now the system description has the form:
$$\begin{bmatrix} v_1 \\ v_2 \end{bmatrix} = \begin{bmatrix} \theta_2 x_1^{\theta_1} \\ \theta_2 x_2^{\theta_1} \end{bmatrix} = \begin{bmatrix} e^{\theta_1 x_1 + \ln \theta_2} \\ e^{\theta_1 x_2 + \ln \theta_2} \end{bmatrix},$$

and identification algorithm:
$$\begin{bmatrix} \theta_1 \\ \ln \theta_2 \end{bmatrix} = \begin{bmatrix} \frac{\ln v_2 - \ln v_1}{\ln x_2 - \ln x_1} \\ \frac{\ln v_1 \ln x_2 - \ln v_2 \ln x_1}{\ln x_2 - \ln x_1} \end{bmatrix}.$$



Identification of complex systems with restricted measurement possibilities

Example 2 Now let us assume, that both elements are linear ones,

$$y_1 = \theta_1 u_1 \quad y_2 = \theta_2 u_2.$$

The description of the system as a new element has the form:

$$v = \theta_1 \theta_2 x,$$

$\theta^T = [\theta_1 \quad \theta_2]$ is a vector of unknown parameters.

For external inputs $x_1 \neq x_2$ outputs v_1 and v_2 were measured ($N = 2$).

Now the system description has the form:
$$\begin{bmatrix} v_1 \\ v_2 \end{bmatrix} = \begin{bmatrix} \theta_1 \theta_2 x_1 \\ \theta_1 \theta_2 x_2 \end{bmatrix}.$$

It is possible to determine:
$$\theta_1 \theta_2 = \frac{v_n}{x_n}, n = 1, 2..$$



Deterministic separability

$$y = \begin{bmatrix} y_1 \\ y_2 \\ \vdots \\ y_M \end{bmatrix} = \begin{bmatrix} F_1(u_1, \theta_1) \\ F_2(u_2, \theta_2) \\ \vdots \\ F_M(u_M, \theta_M) \end{bmatrix} \stackrel{df}{=} \bar{F}(u, \theta),$$

where θ is a vector of all parameters of particular elements i.e.:

$$\theta = \begin{bmatrix} \theta^{(1)} \\ \theta^{(2)} \\ \vdots \\ \theta^{(R)} \end{bmatrix} \stackrel{df}{=} \begin{bmatrix} \theta_1 \\ \theta_2 \\ \vdots \\ \theta_M \end{bmatrix}, \quad \theta \in \Theta = \Theta_1 \times \Theta_2 \times \dots \times \Theta_M \subseteq \mathcal{R}^R, \quad R = \sum_{m=1}^M R_m.$$

The characteristic of the system as a whole with external inputs x outputs v is:

$$v = C\bar{F}^{-1}(x, \theta; A, B) \stackrel{df}{=} F(x, \theta).$$



Deterministic separability

Example 3. Description of the m – th element has the form:

$y_m = \mathbf{E}_m u_m$, $m = 1, 2, \dots, M$, where: \mathbf{E}_m is $L_m \times S_m$ matrices of parameters i.e.:

$$\mathbf{E}_m = \left[\theta_m^{(l,s)} \right] \begin{matrix} | \\ l=1, 2, \dots, L_m \\ | \\ s=1, 2, \dots, S_m \end{matrix}.$$

Now, the relation is:

$$\begin{bmatrix} y_1 \\ y_2 \\ \vdots \\ y_M \end{bmatrix} = \begin{bmatrix} \mathbf{E}_1 & \mathbf{O} & \cdots & \mathbf{O} \\ \mathbf{O} & \mathbf{E}_2 & \cdots & \mathbf{O} \\ \vdots & \vdots & \ddots & \vdots \\ \mathbf{O} & \mathbf{O} & \cdots & \mathbf{E}_M \end{bmatrix} \begin{bmatrix} u_1 \\ u_2 \\ \vdots \\ u_M \end{bmatrix}, \quad \mathbf{E} \stackrel{df}{=} \begin{bmatrix} \mathbf{E}_1 & \mathbf{O} & \cdots & \mathbf{O} \\ \mathbf{O} & \mathbf{E}_2 & \cdots & \mathbf{O} \\ \vdots & \vdots & \ddots & \vdots \\ \mathbf{O} & \mathbf{O} & \cdots & \mathbf{E}_M \end{bmatrix}$$



Deterministic separability

$$y = \Xi u = \Xi(Ay + Bx) \Rightarrow y = (I - \Xi A)^{-1} Bx .$$

Taking into account system structure and measurement possibilities the description of the whole system has the form:

$$v = C(I - \Xi A)^{-1} \Xi B x ,$$

under condition that $(I - \Xi A)$ is non-singular matrix. Notice that complex system composed by linear elements gives linear system

$$v = \tilde{\Xi} x ,$$

where:

$$\tilde{\Xi} = C(I - \Xi A)^{-1} \Xi B .$$



Deterministic separability

Definition 2 The complex system with a given structure and characteristics of each element known with accuracy to parameters is called separable, if the element defined by measurement possibilities is identifiable.

Using Definition of the identifiability we can conclude, that complex system is separable if there exists such a sequence

$$X_N = [x_1 \quad x_2 \quad \cdots \quad x_N],$$

which together with corresponding results of output measurements

$$V_N = [v_1 \quad v_2 \quad \cdots \quad v_N],$$

uniquely determines plant characteristic parameters. In the other words, the complex system is separable if there exists such an identification sequence X_N , which together with output measurements V_N gives system of equations

$$v_n = F(x_n, \theta), \quad n = 1, 2, \dots, N,$$

for which there exists the unique solution with respect to θ .



Deterministic separability

Let us notice that parameters θ in the characteristic, for the newly defined element, are transformed. The characteristic can be rewritten in the form:

$$v = C\bar{F}^{-1}(x, \theta; A, B) = F(x, \theta) \stackrel{df}{=} \tilde{F}(x, \tilde{\theta}),$$

and finally:

$$v = \tilde{F}(x, \tilde{\theta}),$$

where vector of plant parameters $\tilde{\theta}$ in the newly defined plant is given by the relation

$$\tilde{\theta} \stackrel{df}{=} \Gamma(\theta),$$

where Γ is a known function such that:

$$\Gamma : \Theta \rightarrow \tilde{\Theta}, \tilde{\Theta} = \{\tilde{\theta} : \forall \theta \in \Theta, \tilde{\theta} = \Gamma(\theta)\} \subseteq \mathcal{R}^{\tilde{R}},$$

\tilde{R} is dimension of the new plant characteristic and \tilde{F} is a known function, such that:

$$\tilde{F} : \mathcal{X} \times \tilde{\Theta} \rightarrow \mathcal{V}.$$



Deterministic separability

The form of functions \tilde{F} and Γ depends on the description of particular elements, system structure and measurement possibilities. Coming back to the examples, the characteristics for Example 1 has the form:

$$v = \theta_2 x^{\theta_1} = e^{\theta_1 x + \ln \theta_2} = e^{\tilde{\theta}_1 x + \tilde{\theta}_2},$$

where $\tilde{\theta} = \begin{bmatrix} \tilde{\theta}_1 \\ \tilde{\theta}_2 \end{bmatrix} = \begin{bmatrix} \theta_1 \\ \ln \theta_2 \end{bmatrix},$

and characteristic for Example 2:

$$v = \theta_1 \theta_2 x = \tilde{\theta} x,$$

where $\tilde{\theta} = \theta_1 \theta_2.$



Deterministic separability

Theorem 1 The complex system is separable if the element is identifiable and function Γ is an one to one mapping.

Proof:

$$v_n = \tilde{F}(x_n, \tilde{\theta}), \quad n = 1, 2, \dots, N,$$

which have the unique solution with respect to $\tilde{\theta}$. The system of equations may be rewritten in the form:

$$V_N = \tilde{F}(X_N, \tilde{\theta}).$$

and solution with respect to $\tilde{\theta}$ gives identification algorithm:

$$\begin{aligned} \tilde{\theta} &= \tilde{F}^{-1}(X_N, V_N) \stackrel{df}{=} \tilde{\Psi}_N(X_N, V_N), \\ \theta &= \Gamma^{-1}(\tilde{\theta}), \end{aligned}$$

where Γ^{-1} is an inverse function of Γ . Finally, we obtain identification algorithm:


$$\theta = \Gamma^{-1}(\tilde{\Psi}_N(X_N, Y_N)) = \Psi_N(X_N, Y_N).$$



Probabilistic separability

$$\theta_1, \theta_2$$


$$f_1(\theta_1), f_2(\theta_2)$$

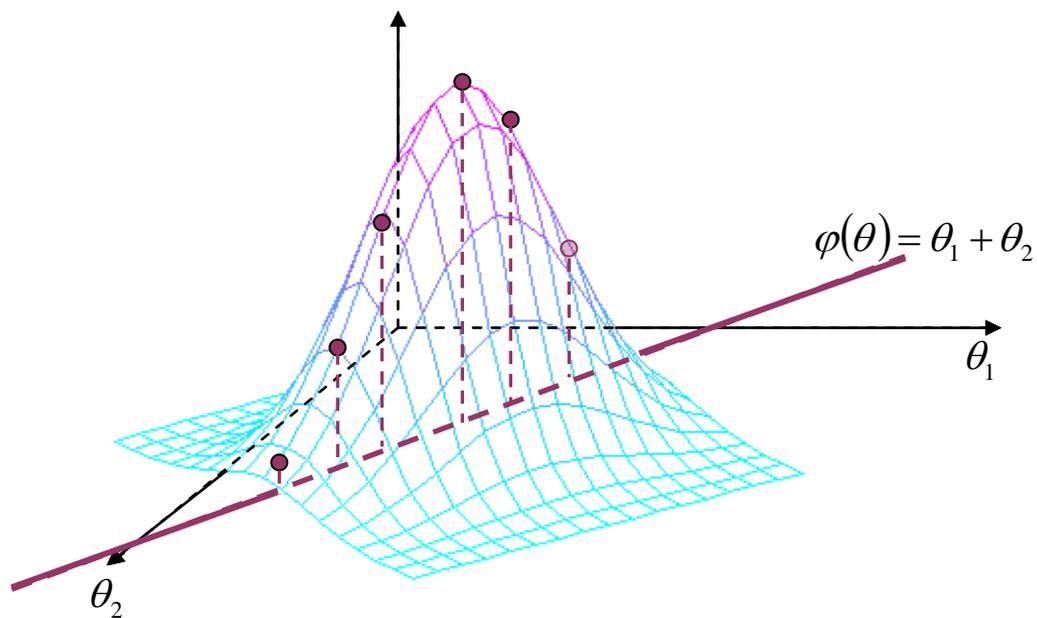



Probabilistic separability

utilization of a priori
information

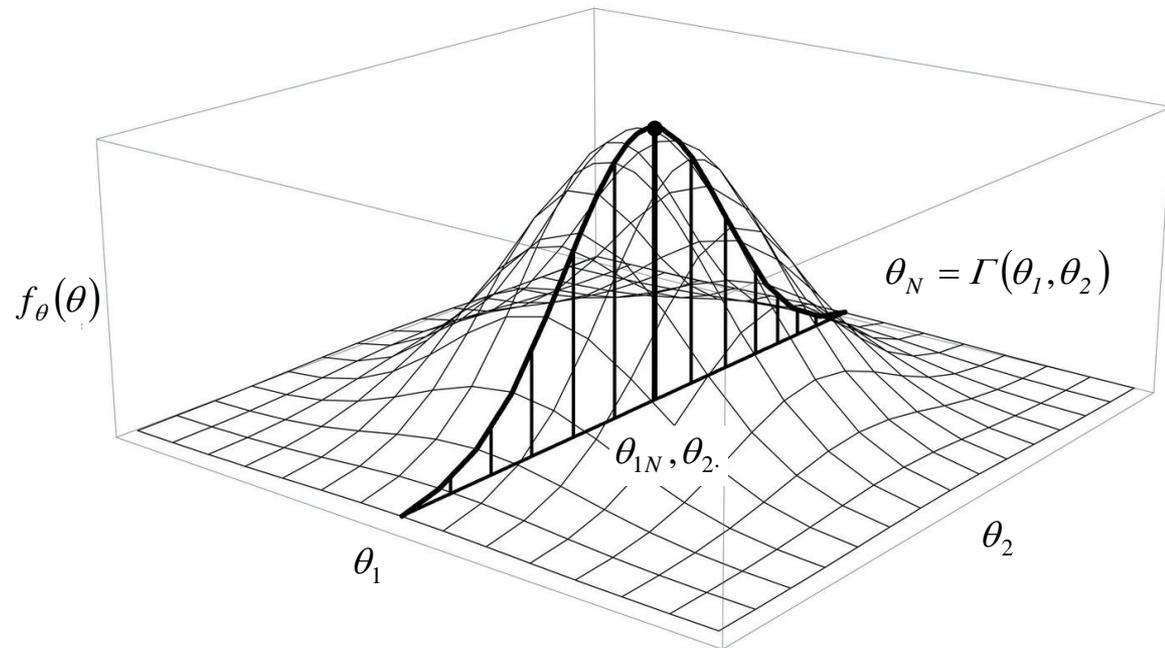

$$v = C\bar{F}_y^{-1}(x, \theta; A, B) = F(x, \theta) \stackrel{\text{df}}{=} \tilde{F}(x, \tilde{\theta}), \quad \tilde{\theta} \stackrel{\text{df}}{=} \Gamma(\theta),$$



Choice of the best model of complex system

Let us consider input - output complex system with M elements O_1, O_2, \dots, O_M . The structure of the complex system, are given by matrices A and B in complex system description. Static characteristic for elements is unknown. For m -th element with input u_m and output y_m the following model is proposed:

$$\bar{y}_m = \Phi_m(u_m, \theta_m),$$

\bar{y}_m is output of the model, Φ_m is a known, proposed by us, function and θ_m is vector of unknown parameters of the m -th element model. Model output and vector of model parameters are elements of the respective spaces, i.e.:

$$\bar{y}_m = \begin{bmatrix} \bar{y}_m^{(1)} \\ \bar{y}_m^{(2)} \\ \vdots \\ \bar{y}_m^{(s_m)} \end{bmatrix} \in \mathcal{Y}_m \subseteq \mathcal{R}^{L_m}, \quad \theta_m = \begin{bmatrix} \theta_m^{(1)} \\ \theta_m^{(2)} \\ \vdots \\ \theta_m^{(R_m)} \end{bmatrix} \in \Theta_m \subseteq \mathcal{R}^{R_m},$$



Choice of the best model of complex system

Let:

$$u = \begin{bmatrix} u^{(1)} \\ u^{(2)} \\ \vdots \\ u^{(S)} \end{bmatrix} \stackrel{df}{=} \begin{bmatrix} u_1 \\ u_2 \\ \vdots \\ u_M \end{bmatrix}, \quad y = \begin{bmatrix} y^{(1)} \\ y^{(2)} \\ \vdots \\ y^{(L)} \end{bmatrix} \stackrel{df}{=} \begin{bmatrix} y_1 \\ y_2 \\ \vdots \\ y_M \end{bmatrix}, \quad \bar{y} = \begin{bmatrix} \bar{y}^{(1)} \\ \bar{y}^{(2)} \\ \vdots \\ \bar{y}^{(L)} \end{bmatrix} \stackrel{df}{=} \begin{bmatrix} \bar{y}_1 \\ \bar{y}_2 \\ \vdots \\ \bar{y}_M \end{bmatrix},$$

where vector of all the system inputs: $u \in \mathcal{U} = \mathcal{U}_1 \times \mathcal{U}_2 \times \dots \times \mathcal{U}_M \subseteq \mathcal{R}^S$, $S = \sum_{m=1}^M S_m$, and vector of all the

plant outputs and all model outputs: $y, \bar{y} \in \mathcal{Y} = \mathcal{Y}_1 \times \mathcal{Y}_2 \times \dots \times \mathcal{Y}_M \subseteq \mathcal{R}^L$, $L = \sum_{m=1}^M L_m$. Only some outputs

will be taken into account. Those outputs will be called the global outputs v , and they are shown by $\tilde{L} \times L$ dimensional matrices C where \tilde{L} is a number of selected outputs from the all outputs of complex system, i.e.:

$$v = Cy,$$

where $v \in \mathcal{V} = \{v : \forall y \in \mathcal{Y}, v = Cy\} \subseteq \mathcal{R}^{\tilde{L}}$.



Choice of the best model of complex system

$$\bar{y} = \begin{bmatrix} \bar{y}_1 \\ \bar{y}_2 \\ \vdots \\ \bar{y}_M \end{bmatrix} = \begin{bmatrix} \Phi_1(u_1, \theta_1) \\ \Phi_2(u_2, \theta_2) \\ \vdots \\ \Phi_M(u_M, \theta_M) \end{bmatrix} \stackrel{df}{=} \bar{\Phi}(u, \theta),$$

$$u = A\bar{y} + Bx,$$

$$\bar{v} = C\bar{y},$$

where: $\bar{v} \in \mathcal{V} = \{\bar{v} : \forall \bar{y} \in \mathcal{Y}, \bar{v} = C\bar{y}\} \subseteq \mathcal{R}^{\tilde{L}}$,

and unknown vector of model parameters: $\theta \in \Theta = \Theta_1 \times \Theta_2 \times \dots \times \Theta_M \subseteq \mathcal{R}^R$, $R = \sum_{m=1}^M R_m$.



Choice of the best model of complex system

Output of the model may be expressed as:

$$\bar{y} = \bar{\Phi}(A\bar{y} + Bx, \theta).$$

Solution of above equation with respect to \bar{y} gives:

$$\bar{y} = \bar{\Phi}^{-1}(x, \theta; A, B).$$

and finally by substituting this solution into the system description we obtain:


$$\bar{v} = C\bar{\Phi}^{-1}(x, \theta; A, B) \stackrel{df}{=} \Phi(x, \theta).$$

The relation above is a model of the complex system with external input x and global output \bar{v} .



Choice of the best model of complex system

- Locally optimal model of complex system

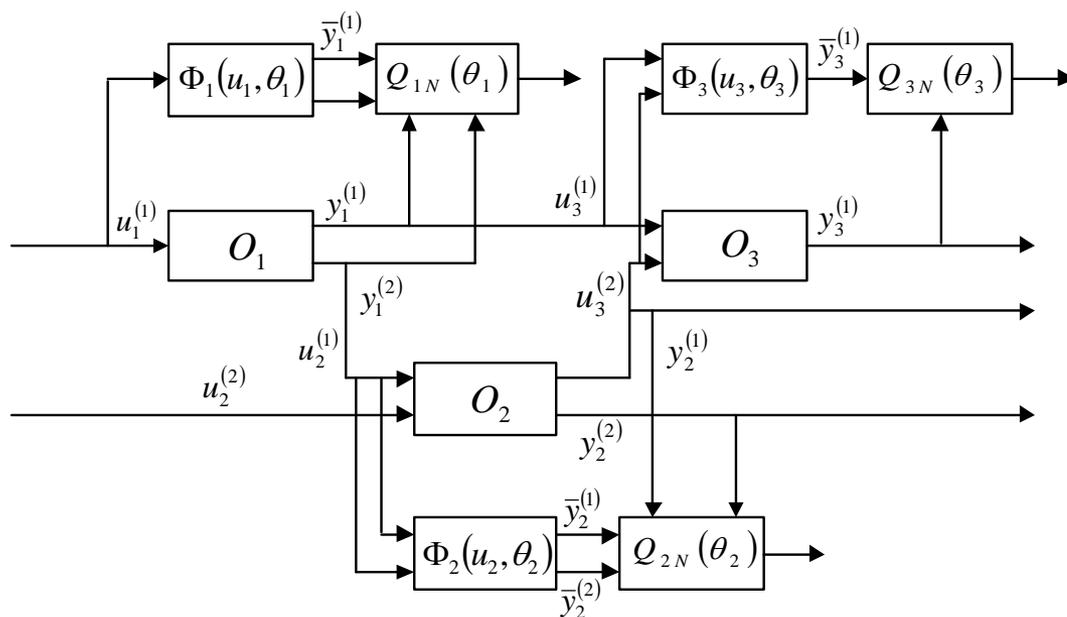



Choice of the best model of complex system

- Locally optimal model of complex system

Now, it will be assumed that each element of complex system is observed independently. For m -th elements for a given input sequence the output is measured. The results of the experiment are collected in the following matrices:

$$U_{mN_m} = \begin{bmatrix} u_{m1} & u_{m2} & \cdots & u_{mN_m} \end{bmatrix}, \quad Y_{mN_m} = \begin{bmatrix} y_{m1} & y_{m2} & \cdots & y_{mN_m} \end{bmatrix},$$

where N_m is a number of measurement points for m -th element, $m = 1, 2, \dots, M$.

For each m -th element we propose a model. We also propose the performance index:

$$Q_{mN_m}(\theta_m) = \left\| Y_{mN_m} - \bar{Y}_{mN_m}(\theta_m) \right\|_{U_{mN_m}},$$

where: $\bar{Y}_{mN_m}(\theta_m) \stackrel{df}{=} \begin{bmatrix} \Phi_m(u_{m1}, \theta_m) & \Phi_m(u_{m2}, \theta_m) & \cdots & \Phi_m(u_{mN_m}, \theta_m) \end{bmatrix}$.



Choice of the best model of complex system

- Locally optimal model of complex system

The example of performance indexes $Q_{N_m m}(\theta_m)$:

$$Q_{N_m m}(\theta_m) = \sum_{n=1}^{N_m} q_m(y_{mn}, \bar{y}_{mn}) = \sum_{n=1}^{N_m} q_m(y_{mn}, \Phi_m(u_{mn}, \theta_m)),$$

$$Q_{mN_m}(\theta_m) = \max_{1 \leq n \leq N_m} \{q_m(y_{mn}, \bar{y}_{mn})\} = \max_{1 \leq n \leq N_m} \{q_m(y_{mn}, \Phi_m(u_{mn}, \theta))\}.$$



Choice of the best model of complex system

- Locally optimal model of complex system

The optimal value of vector model parameters for m -th element is obtained by minimization of the performance index $Q_{mN_m}(\theta_m)$ with respect to θ_m from the space Θ_m

$$\theta_{mN_m}^* \rightarrow Q_{mN_m}(\theta_{mN_m}^*) = \min_{\theta_m \in \Theta_m} Q_{mN_m}(\theta_m),$$

where $\theta_{mN_m}^*$ is the optimal value of m -th model parameters and function Φ_m with vector $\theta_{mN_m}^*$, i.e.:

$$\bar{y}_m = \Phi_m(u_m, \theta_{mN_m}^*),$$

is called locally optimal model of m -th element. The local identification task is repeated for each element separately, i.e.: $m = 1, 2, \dots, M$.



Choice of the best model of complex system

- Locally optimal model of complex system

Let us denote vector of all the locally optimal parameters by: $\theta_N^* \stackrel{df}{=} \begin{bmatrix} \theta_{1N_1}^* \\ \theta_{2N_2}^* \\ \vdots \\ \theta_{MN_M}^* \end{bmatrix}$,

where: $N = \sum_{m=1}^M N_m$. The model of the complex system with locally optimal parameters, i.e.:


$$\bar{v} = C \bar{\Phi}^{-1}(x, \theta_N^*; A, B) \stackrel{df}{=} \Phi(x, \theta_N^*).$$

is called locally optimal model of complex system.



Choice of the best model of complex system

- Globally optimal model of complex system

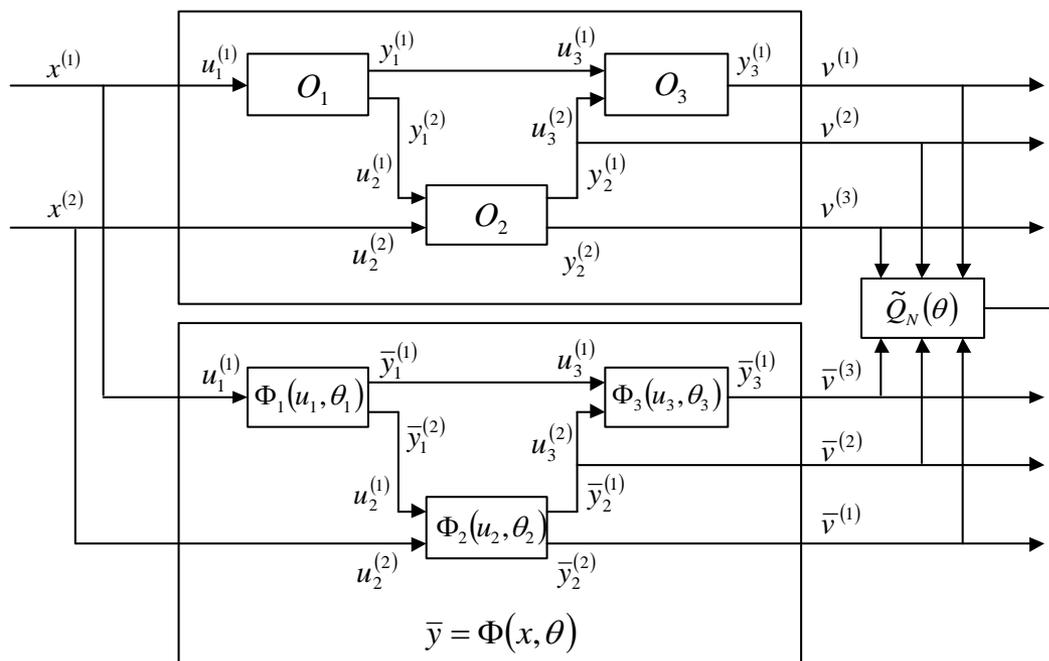



Choice of the best model of complex system

- Globally optimal model of complex system

Performance index:

$$Q_N(\theta) = \|V_N - \bar{V}_N(\theta)\|_{X_N}$$

shows the difference between the result of the experiment V_N and the respective sequence of model outputs calculated for input sequence X_N , i.e.: $\bar{V}_N(\theta) \stackrel{df}{=} [\Phi(x_1, \theta) \quad \Phi(x_2, \theta) \quad \dots \quad \Phi(x_N, \theta)]$.

$$\tilde{\theta}_N \rightarrow Q_N(\tilde{\theta}_N) = \min_{\theta \in \Theta} Q_N(\theta),$$

where: $\tilde{\theta}_N$ is the optimal vector of model parameters and

$$\bar{v} = \Phi(u, \tilde{\theta}_N)$$


is called a globally optimal model of complex system.



Multi-criteria approach

x – vector of decision variables

$F_1(x), F_2(x), \dots, F_M(x)$ – performance indices

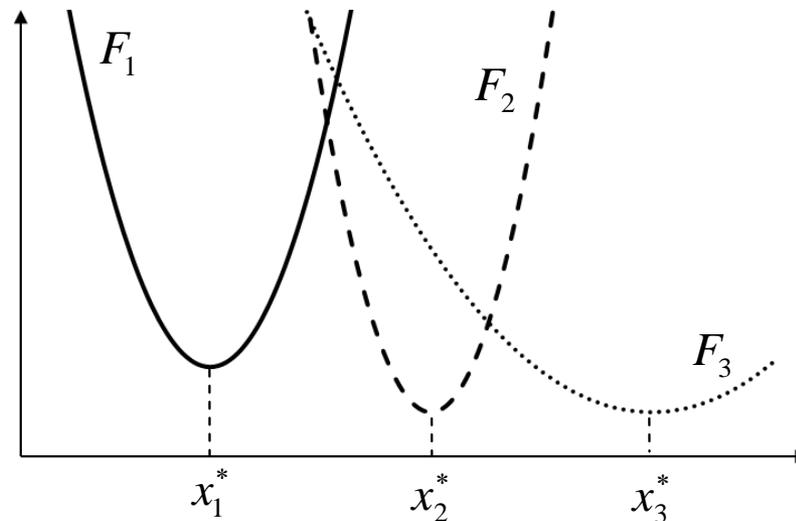



Multi-criteria approach


- Synthetic performance index

$$F(x) = H(F_1(x), F_2(x), \dots, F_M(x))$$

i. e.:
$$F(x) = \sum_{m=1}^K \alpha_m F_m(x)$$

where:
$$\sum_{m=1}^M \alpha_m = 1, \alpha_m > 0, k = 1, 2, \dots, M$$

Solution:
$$x^* \rightarrow F(x^*) = \min_{x \in \mathcal{D}_x} F(x)$$

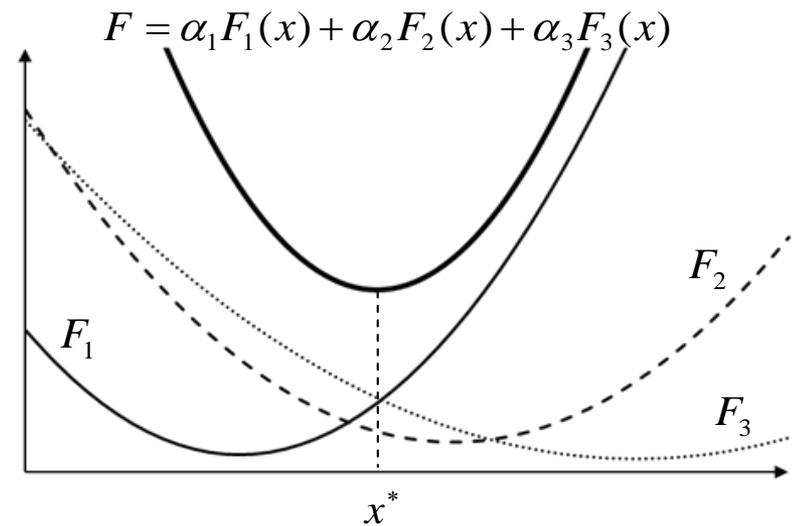



Multi-criteria approach


- Select preferred performance index, the other – sufficient quality

$F_1(x)$ – selected performance index

$$F_m(x) \leq \beta_m, \quad k = 2, 3, \dots, M$$

$$\overline{\mathcal{D}}_x = \mathcal{D}_x \cap \{x \in \mathcal{R}^S : F_m(x) \leq \beta_m, m = 2, \dots, K\}$$

Solution: $x^* \rightarrow F_1(x^*) = \min_{x \in \overline{\mathcal{D}}_x} F_1(x)$

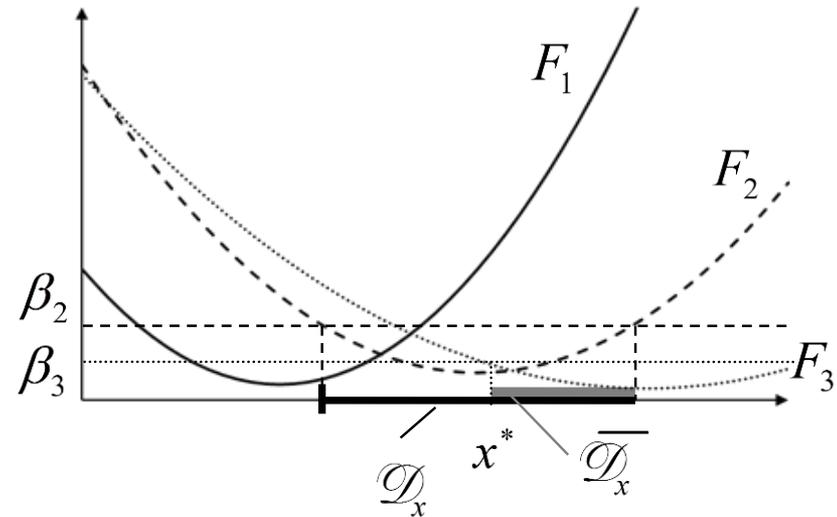



Choice of the best model of complex system

- Globally optimal model with local quality guaranteed

Synthetic performance index which takes into account both local and global model qualities:

$$\bar{Q}_N(\theta) = \alpha_0 Q_N(\theta) + \sum_{m=1}^M \alpha_m Q_{mN}(\theta_m),$$

where: $\alpha_0, \alpha_1, \dots, \alpha_M$ is a sequence of weight coefficients. They show weigh of participation of global and local performance indexes respectively, in the synthetic performance index. Now the optimal model parameters for synthetic performance index:

$$\bar{\theta}_N \rightarrow \bar{Q}_N(\bar{\theta}_N) = \min_{\theta \in \Theta} \bar{Q}_N(\theta),$$

where $\bar{\theta}_N$ is an optimal vector for global model for synthetic performance index.



Choice of the best model of complex system

- Globally optimal model with local quality guaranteed

In the other approach we assume that local models must be sufficiently good:

$$Q_{mN}(\theta_m) \leq \beta_m, \quad m = 1, 2, \dots, M,$$

where quality sufficient number β_m is greater than locally optimal performance index, i.e.:

$$\beta_m > Q_{mN}(\theta_m^*), \quad m = 1, 2, \dots, M.$$

Now, the optimal model parameters will be obtained by minimization global performance index with additional constraints, i.e.:


$$\tilde{\theta}_N^* \rightarrow Q_N(\tilde{\theta}_N^*) = \min_{\theta \in \tilde{\Theta}} Q_N(\theta),$$

where $\tilde{\Theta} \stackrel{df}{=} \left\{ \theta \in \Theta \subseteq \mathcal{R}^R : Q_m(\theta_m) \leq \beta_m, \quad \beta_m > Q_m(\theta_m^*), \quad m = 1, 2, \dots, M. \right\}$

and $\tilde{\theta}_N^*$ is a globally optimal vector parameters sufficiently good for local models.



Complex system with cascade structure

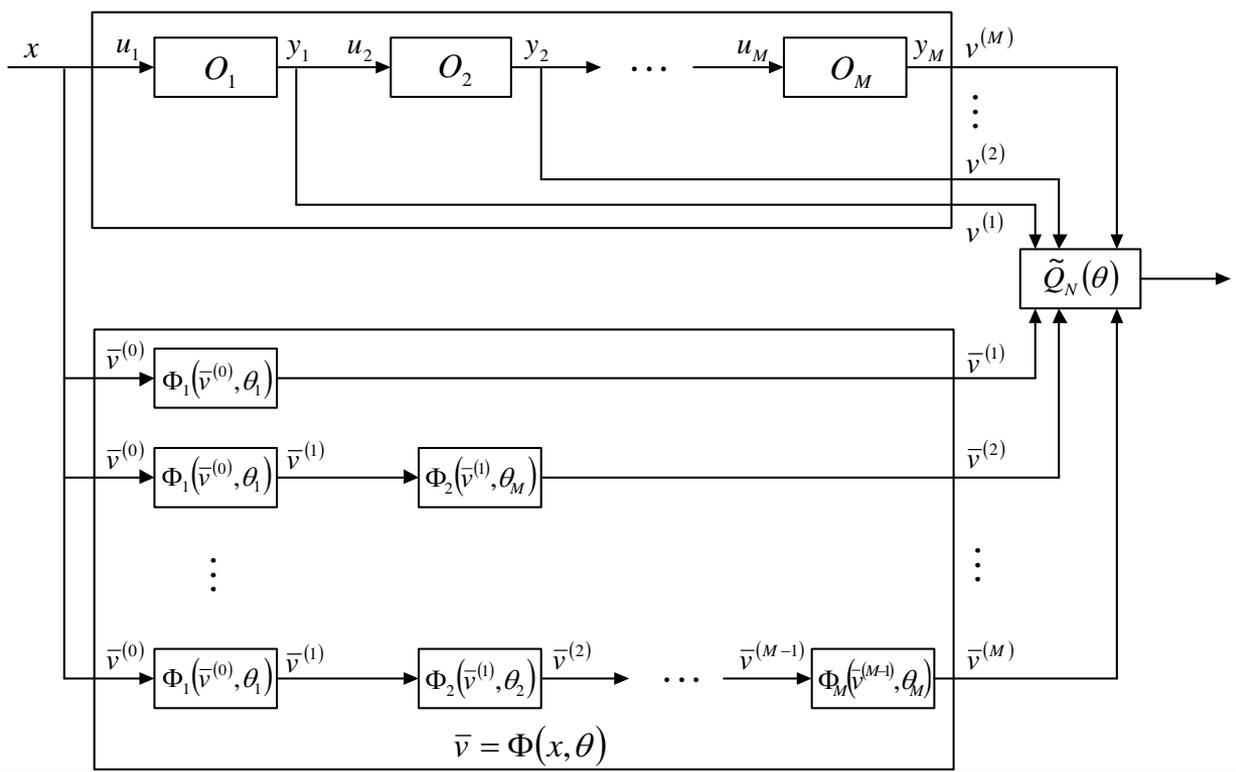



Complex system with cascade structure

The global model has the form:

$$\begin{bmatrix} \bar{v}^{(1)} \\ \bar{v}^{(2)} \\ \vdots \\ \bar{v}^{(M)} \end{bmatrix} = \begin{bmatrix} \Phi_1(x, \theta_1) \\ \Phi_2(\Phi_1(x, \theta_1), \theta_2) \\ \vdots \\ \Phi_M(\cdots \Phi_2(\Phi_1(x, \theta_1), \theta_2) \cdots \theta_M) \end{bmatrix}$$



Complex system with cascade structure

Notice that the model may be given in the recursive form:

$$\bar{v}^{(m+1)} = \Phi_m(\bar{v}^{(m)}, \theta_m), \quad m = 0, 1, \dots, M$$

where $\bar{v}^{(0)} = x$.

The global identification performance index is:

$$Q(\theta) = \sum_{n=1}^N \sum_{m=1}^M q(v_n^{(m)}, \bar{v}_n^{(m)})$$



Identification algorithm based on dynamic programming

Step 1. Determine \tilde{a}_M such that

$$\tilde{a}_M = \Psi_M \left(V_N^{(M)}, \bar{V}_N^{(M-1)} \right) \rightarrow \min_{a_M} \sum_{n=1}^N q_M \left(v_n^{(M)}, \Phi_M \left(\bar{v}_n^{(M-1)}, a_M \right) \right) = \bar{Q}_M \left(V_N^{(M)}, \bar{V}_N^{(M-1)} \right)$$

where:

$V_N^{(M)} = [v_1^{(M)} \ v_2^{(M)} \ \dots \ v_N^{(M)}]$ - sequence of measurements of M-th global output,

$\bar{V}_N^{(M-1)}$ - sequence of outputs of (M-1)-th element in cascade structure.

$$\bar{V}_N^{(M-1)} = [\bar{v}_1^{(M-1)} \ \bar{v}_2^{(M-1)} \ \dots \ \bar{v}_N^{(M-1)}]$$

$$\bar{V}_N^{(M-1)} = [\Phi_{M-1}(\bar{v}_1^{(M-2)}, a_{M-1}) \ \Phi_{M-1}(\bar{v}_2^{(M-2)}, a_{M-1}) \ \dots \ \Phi_{M-1}(\bar{v}_N^{(M-2)}, a_{M-1})] = \bar{\Phi}_{M-1}(\bar{V}_N^{(M-2)}, a_{M-1})$$

Consequently solution may be rewritten:

$$\bar{Q}_M \left(V_N^{(M)}, \bar{V}_N^{(M-1)} \right) = \bar{Q}_M \left(V_N^{(M)}, \bar{\Phi}_{M-1}(\bar{V}_N^{(M-2)}, a_{M-1}) \right)$$



Identification algorithm based on dynamic programming

Step 2. Determine \tilde{a}_{M-1} such that

$$\tilde{a}_{M-1} = \Psi_{M-1} \left(V_N^{(M)}, V_N^{(M-1)}, \bar{V}_N^{(M-2)} \right) \rightarrow$$

$$\min_{a_{M-1}} \left\{ \sum_{n=1}^N q_{M-1} \left(v_n^{(M-1)}, \Phi_{M-1} \left(\bar{v}_n^{(M-2)}, a_{M-1} \right) \right) + \bar{Q}_M \left(V_N^{(M)}, \bar{\Phi}_M \left(\bar{V}_N^{(M-2)}, a_{M-1} \right) \right) \right\} = \bar{Q}_{M-1} \left(V_N^{(M)}, V_N^{(M-1)}, \bar{V}_N^{(M-2)} \right)$$

where:

$V_N^{(M-1)} = \left[v_1^{(M-1)} \ v_2^{(M-1)} \ \dots \ v_N^{(M-1)} \right]$ - sequence of measurements of $(M-1)$ -th global output,

$\bar{V}_N^{(M-2)}$ - sequence of outputs of $(M-2)$ -th element in cascade structure.

$$\bar{V}_N^{(M-2)} = \left[\bar{v}_1^{(M-2)} \ \bar{v}_2^{(M-2)} \ \dots \ \bar{v}_N^{(M-2)} \right]$$

We obtain $\bar{V}_N^{(M-2)} = \left[\Phi_{M-2} \left(\bar{v}_1^{(M-3)}, a_{M-2} \right) \ \Phi_{M-2} \left(\bar{v}_2^{(M-3)}, a_{M-2} \right) \ \dots \ \Phi_{M-2} \left(\bar{v}_N^{(M-3)}, a_{M-2} \right) \right] = \bar{\Phi}_{M-2} \left(\bar{V}_N^{(M-3)}, a_{M-2} \right)$

Consequently solution may be rewritten

$$\bar{Q}_{M-1} \left(V_N^{(M)}, V_N^{(M-1)}, \bar{V}_N^{(M-2)} \right) = \bar{Q}_{M-1} \left(V_N^{(M)}, V_N^{(M-1)}, \bar{\Phi}_{M-2} \left(\bar{V}_N^{(M-3)}, a_{M-2} \right) \right)$$



Identification algorithm based on dynamic programming

Step (M-1). Determine \tilde{a}_2 such that

$$\tilde{a}_2 = \Psi_2(V_N^{(M)}, V_N^{(M-1)}, \dots, V_N^{(2)}, \bar{V}_N^{(1)}) \rightarrow$$

$$\min_{a_2} \left\{ \sum_{n=1}^N q_2(v_n^{(2)}, \Phi_2(\bar{v}_n^{(1)}, a_2)) + \bar{Q}_3(V_N^{(M)}, V_N^{(M-1)}, \dots, V_N^{(3)}, \bar{\Phi}_2(\bar{V}_N^{(1)}, a_2)) \right\} = \bar{Q}_2(V_N^{(M)}, V_N^{(M-1)}, \dots, V_N^{(2)}, \bar{V}_N^{(1)})$$

where:

$V_N^{(2)} = [v_1^{(2)} \ v_2^{(2)} \ \dots \ v_N^{(2)}]$ - sequence of measurements of second global output,

$\bar{V}_N^{(1)}$ - sequence of outputs of the first element in cascade structure.

$$\bar{V}_N^{(1)} = [\bar{v}_1^{(1)} \ \bar{v}_2^{(1)} \ \dots \ \bar{v}_N^{(1)}]$$

We obtain $\bar{V}_N^{(1)} = [\Phi_1(\bar{v}_1^{(0)}, a_1) \ \Phi_1(\bar{v}_2^{(0)}, a_1) \ \dots \ \Phi_1(\bar{v}_N^{(0)}, a_1)] = [\Phi_1(x_1, a_1) \ \Phi_1(x_2, a_1) \ \dots \ \Phi_1(x_N, a_1)] = \bar{\Phi}_1(X_N, a_1)$

where: $\bar{V}_N^{(0)} = [\bar{v}_1^{(0)} \ \bar{v}_2^{(0)} \ \dots \ \bar{v}_N^{(0)}] = [x_1 \ x_2 \ \dots \ x_N] = X_N$, X_N - sequence of the external input.

Consequently:

$$\bar{Q}_2(V_N^{(M)}, V_N^{(M-1)}, \dots, V_N^{(2)}, \bar{V}_N^{(1)}) = \bar{Q}_2(V_N^{(M)}, V_N^{(M-1)}, \dots, V_N^{(2)}, \bar{\Phi}_1(X_N, a_1))$$



Identification algorithm based on dynamic programming

Step M. Determine \tilde{a}_1 such that

$$\tilde{a}_1 = \Psi_1(V_N^{(M)}, V_N^{(M-1)}, \dots, V_N^{(1)}, X_N) \rightarrow$$

$$\min_{a_1} \left\{ \sum_{n=1}^N q_1(v_n^{(1)}, \Phi_2(x_n, a_1)) + \bar{Q}_2(V_N^{(M)}, V_N^{(M-1)}, \dots, V_N^{(2)}, \bar{\Phi}_2(X_N, a_1)) \right\} = \bar{Q}_1(V_N^{(M)}, V_N^{(M-1)}, \dots, V_N^{(1)}, X_N)$$

where: $V_N^{(1)} = [v_1^{(1)} \ v_2^{(1)} \ \dots \ v_N^{(1)}]$ - sequence of measurements of first global output.



Identification algorithm based on dynamic programming

Now we can come back and determine:

$$\tilde{a}_1 = \Psi_1(V_N^{(M)}, V_N^{(M-1)}, \dots, V_N^{(1)}, X_N)$$

$$\bar{V}_N^{(1)} = \bar{\Phi}_1(X_N, \tilde{a}_1) = \bar{\Phi}_1(X_N, \Psi_1(V_N^{(M)}, V_N^{(M-1)}, \dots, V_N^{(1)}, X_N))$$

which is necessary to determine

$$\tilde{a}_2 = \Psi_2(V_N^{(M)}, V_N^{(M-1)}, \dots, V_N^{(2)}, \bar{V}_N^{(1)}) = \Psi_2(V_N^{(M)}, V_N^{(M-1)}, \dots, V_N^{(2)}, \bar{\Phi}_1(X_N, \Psi_1(V_N^{(M)}, V_N^{(M-1)}, \dots, V_N^{(1)}, X_N)))$$

Finally


$$\tilde{a}_M = \Psi_M(V_N^{(M)}, \bar{V}_N^{(M-1)})$$

the sequence will be determined at the previous step as

$$\bar{V}_N^{(M-1)} = \bar{\Phi}_{M-1}(\bar{V}_N^{(M-2)}, \tilde{a}_{M-1}) .$$




Two stage identification and it's applications

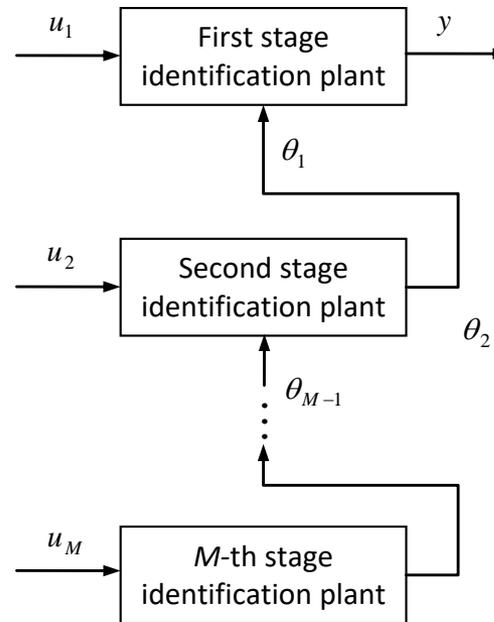




Two stage identification and it's applications

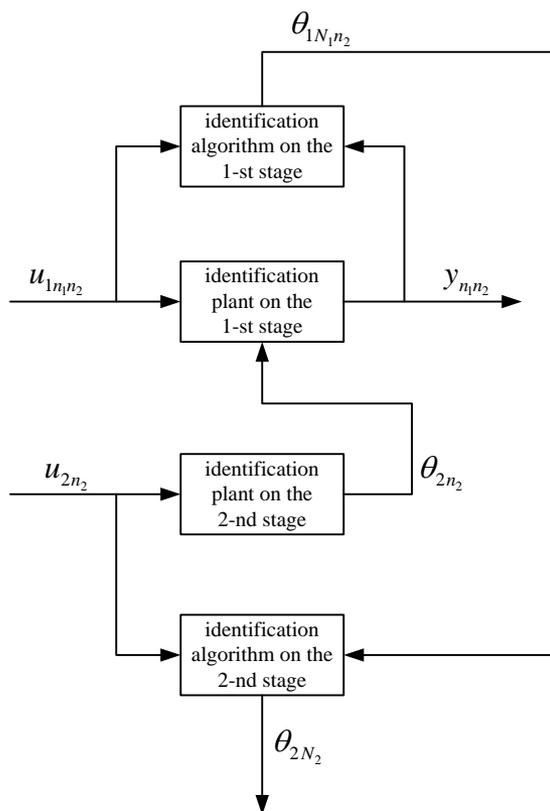

Two stage identification


- Space decomposition
- Time decomposition

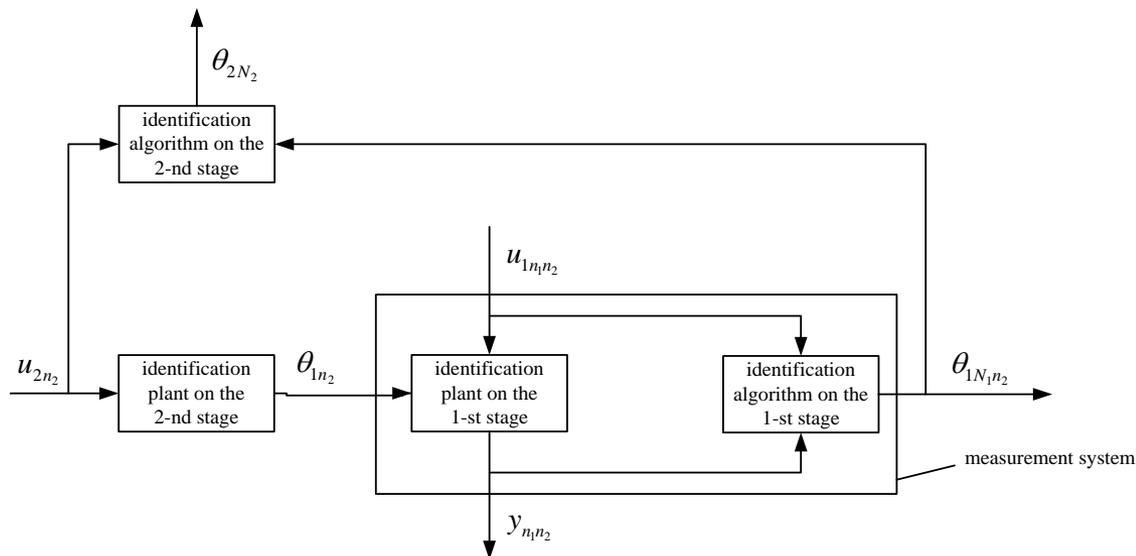



Two stage identification and it's applications


- Distillation column with pulsation

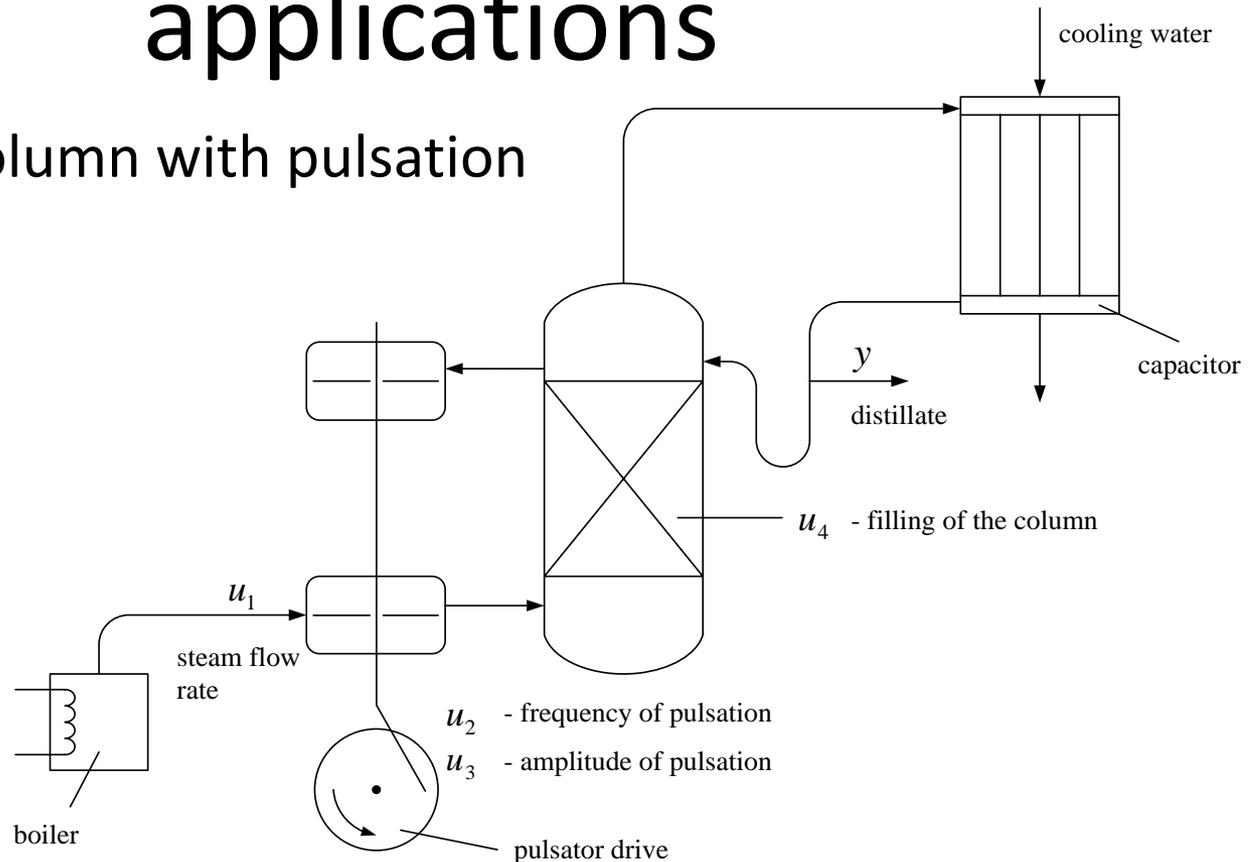



Two stage identification and it's applications

- Distillation column with pulsation

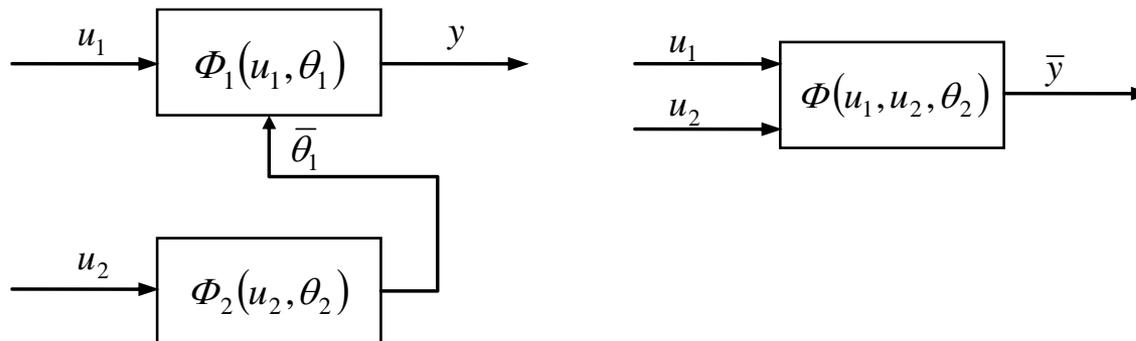


$$\bar{y} = \Phi(u_1, u_2, \theta_2) \stackrel{\text{df}}{=} \Phi_1(u_1, \Phi_2(u_2, \theta_2))$$



Two stage identification and it's applications

- Distillation column with pulsation

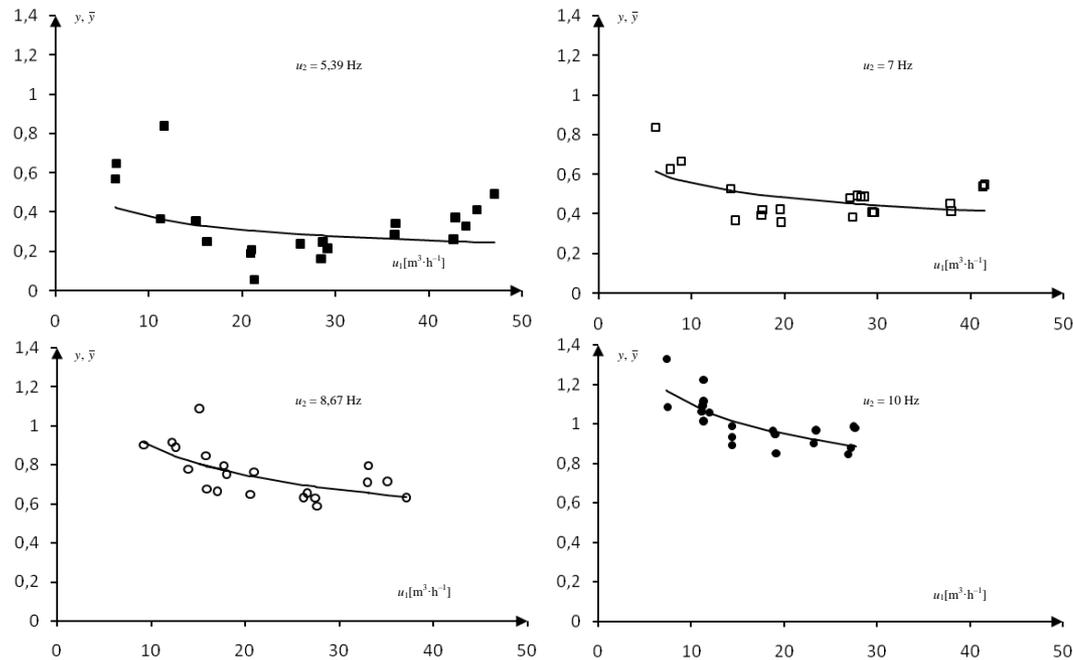



Two stage identification and it's applications

- Distillation column with pulsation

First stage for a given $u_2 = u_{n_2}$

Measurements: $U_{1N_1n_2} \stackrel{\text{df}}{=} [u_{11n_2} \quad u_{12n_2} \quad \cdots \quad u_{1N_1n_2}]$, $Y_{N_1n_2} \stackrel{\text{df}}{=} [y_{1n_2} \quad y_{2n_2} \quad \cdots \quad y_{N_1n_2}]$,

Performance indices: $Q_{1N_1n_2}(\theta_1) = \frac{1}{N_1} \sum_{n_1=1}^{N_1} q_1(y_{n_1n_2}, \Phi_1(u_{1n_1n_2}, \theta_1))$ $\theta_{1N_1n_2}^* = \Psi_{1N_1}(U_{1N_1n_2}, Y_{N_1n_2})$

Second stage

$\Xi_{1N_1N_2}^* \stackrel{\text{df}}{=} [\theta_{1N_11}^* \quad \theta_{1N_12}^* \quad \cdots \quad \theta_{1N_1N_2}^*]$. $U_{2N_2} \stackrel{\text{df}}{=} [u_{21} \quad u_{22} \quad \cdots \quad u_{1N_2}]$,

$Q_{2N_2}(\theta_2) = \frac{1}{N_2} \sum_{n_2=1}^{N_2} q_2(\theta_{1N_1n_2}^*, \Phi_2(u_{2n_2}, \theta_2))$ $\theta_{2N_2}^* = \Psi_{2N_2}(U_{2N_2}, \Xi_{1N_1N_2}^*)$

$Q_{N_1N_2}(\theta_2) = \frac{1}{N_1N_2} \sum_{n_2=1}^{N_2} \sum_{n_1=1}^{N_1} q_1(y_{n_1n_2}, \Phi(u_{1n_1n_2}, u_{2n_2}, \theta_2))$







Two stage identification and it's applications

n_2	$u_{21} = 5,39$ (1)		$u_{22} = 7,00$ (2)		$u_{23} = 8,67$ (3)		$u_{24} = 10,00$ (4)	
n_1	u_{1n_1}	y_{n_1}	u_{1n_2}	y_{n_2}	u_{1n_3}	y_{n_3}	u_{1n_4}	y_{n_4}
1	6,4	0,572060	6,1	0,838889	9,2	0,903488	7,3	1,3301716
2	6,5	0,648202	7,7	0,628602	12,2	0,916698	7,4	1,0848920
3	11,2	0,366938	8,9	0,666820	12,6	0,891862	11,3	1,0875064
4	11,6	0,840378	14,2	0,529828	13,9	0,780235	11,2	1,0617987
5	15,0	0,357619	14,7	0,369640	15,8	0,849268	11,4	1,2248224
6	16,2	0,252894	17,5	0,393696	15,9	0,676236	11,4	1,0097338
7	20,9	0,191408	17,6	0,423408	17,0	0,665933	11,4	1,1105566
8	21,0	0,211237	19,5	0,424521	17,7	0,798994	11,9	1,0569201
9	21,3	0,057237	19,6	0,359882	18,0	0,753221	14,4	0,9896686
10	26,2	0,240598	27,0	0,484021	15,1	1,089871	14,4	0,8944089
11	28,4	0,162991	27,3	0,386058	20,5	0,651258	14,4	0,9357480
12	28,6	0,249399	27,8	0,493950	20,9	0,764347	18,8	0,9650770
13	29,1	0,217105	28,2	0,487298	26,2	0,634033	19,1	0,9483388
14	36,4	0,343625	28,6	0,490247	26,6	0,657183	19,2	0,8510747
15	36,3	0,290017	29,4	0,411630	27,4	0,630113	23,5	0,9645854
16	42,8	0,373851	29,6	0,408095	27,6	0,588806	23,2	0,9037284
17	42,6	0,263002	37,8	0,453555	33,1	0,796697	26,9	0,8480748
18	43,9	0,331933	37,9	0,416033	33,0	0,712234	27,2	0,8781611
19	45,1	0,414180	41,3	0,539947	35,1	0,716245	27,5	0,9828131
20	47,0	0,494438	41,5	0,549499	37,1	0,633244	27,7	0,9799704



Two stage identification and it's applications

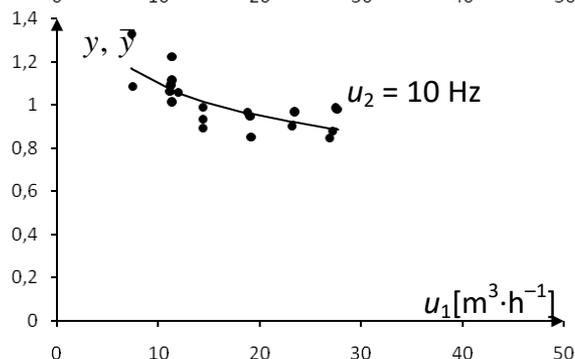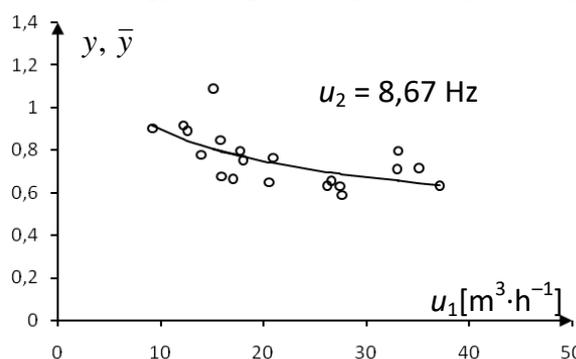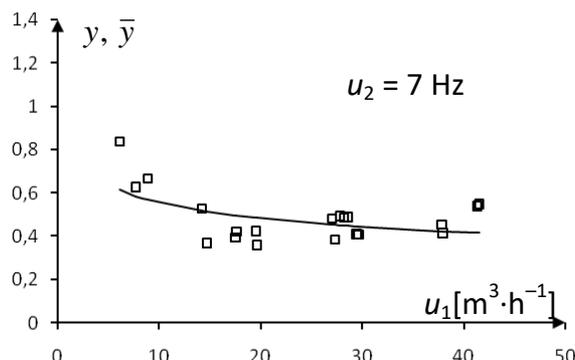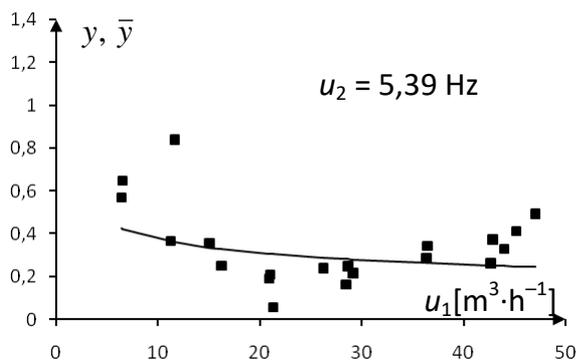



Two stage identification and it's applications

The model: $\bar{y} = \Phi_1(u_1, \theta) = \theta_1^{(2)} u_1^{\theta_1^{(1)}}$

Performance index on the first stage:

$$Q_{1N_1n_2}(\theta_1) = \sum_{n_1=1}^{N_1} \left(\ln y_{n_1n_2} - \ln \left(\theta_1^{(2)} u_{1n_1n_2}^{\theta_1^{(1)}} \right) \right)^2 = \sum_{n_1=1}^{N_1} \left(\ln y_{n_1n_2} - \ln \theta_1^{(2)} - \theta_1^{(1)} \ln u_{1n_1n_2} \right)^2.$$

Identification algorithm
on the first stage:

$$\theta_{1N_1n_2}^* = \begin{bmatrix} \theta_{1N_1n_2}^{*(1)} \\ \theta_{1N_1n_2}^{*(2)} \end{bmatrix} = \begin{bmatrix} \frac{A_{1N_1n_2}^{(1)}}{B_{1N_1n_2}} \\ \exp \left(\frac{A_{1N_1n_2}^{(2)}}{B_{1N_1n_2}} \right) \end{bmatrix}$$

$$A_{1N_1n_2}^{(1)} = \sum_{n_1=1}^{N_1} \ln y_{n_1n_2} \ln u_{1n_1n_2} - \frac{1}{N_1} \left(\sum_{n_1=1}^{N_1} \ln y_{n_1n_2} \right) \left(\sum_{n_1=1}^{N_1} \ln u_{1n_1n_2} \right)$$



$$A_{1N_1n_2}^{(2)} = \frac{1}{N_1} \sum_{n_1=1}^{N_1} (\ln u_{1n_1n_2})^2 \sum_{n_1=1}^{N_1} \ln y_{n_1n_2} - \frac{1}{N_1} \left(\sum_{n_1=1}^{N_1} \ln u_{1n_1n_2} \right) \left(\sum_{n_1=1}^{N_1} \ln y_{n_1n_2} \ln u_{1n_1n_2} \right)$$

$$B_{1N_1n_2} = \sum_{n_1=1}^{N_1} (\ln u_{1n_1n_2})^2 - \frac{1}{N_1} \left(\sum_{n_1=1}^{N_1} \ln u_{1n_1n_2} \right)^2$$



Two stage identification and it's applications

n_2	1	2	3	4
u_{2n_2}	5,33	7,00	8,67	10,0
$\theta_{1N_1n_2}^{*(1)}$	-0,274	-0,203	-0,260	-0,207
$\theta_{1N_1n_2}^{*(2)}$	0,707	0,886	1,635	1,767

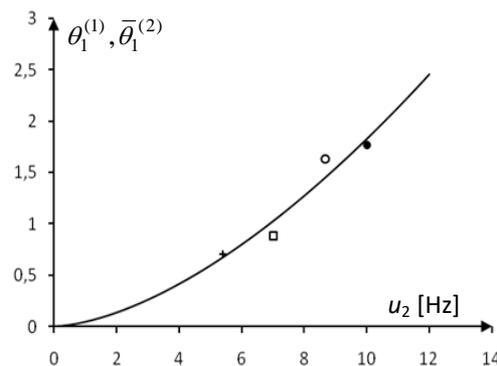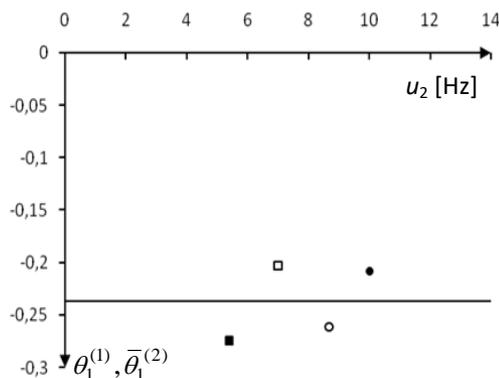

Performance index on the second stage:

$$\bar{\theta}_1 = \Phi_2(u_2, \theta_2) = \begin{bmatrix} \theta_2^{(1)} \\ \theta_2^{(3)} u_2^{\theta_2^{(2)}} \end{bmatrix}$$

$$Q_{2N_2}(\theta_2) = \sum_{n_2=1}^{N_2} \left(\left(\theta_{1N_1n_2}^{*(1)} - \theta_2^{(1)} \right)^2 + \left(\ln \theta_{1N_1n_2}^{*(2)} - \ln \left(\theta_2^{(3)} u_{2n_2}^{\theta_2^{(2)}} \right) \right)^2 \right)$$

$$= \sum_{n_2=1}^{N_2} \left(\left(\theta_{1N_1n_2}^{*(1)} - \theta_2^{(1)} \right)^2 + \left(\ln \theta_{1N_1n_2}^{*(2)} - \ln \theta_2^{(3)} - \theta_2^{(2)} \ln u_{2n_2} \right)^2 \right).$$



Two stage identification and it's applications

Identification algorithm
on the second stage:

$$\theta_{2N_2}^* = \begin{bmatrix} \theta_{2N_2}^{*(1)} \\ \theta_{2N_2}^{*(2)} \\ \theta_{2N_2}^{*(3)} \end{bmatrix} = \begin{bmatrix} \frac{1}{N_2} \sum_{n_2=1}^{N_2} \theta_{1N_1n_2}^{*(1)} \\ \frac{A_{2N_2}^{(1)}}{B_{2N_2}} \\ \exp\left(\frac{A_{2N_2}^{(2)}}{B_{2N_2}}\right) \end{bmatrix}$$

$$A_{2N_2}^{(1)} = \sum_{n_2=1}^{N_2} \ln \theta_{1n_1n_2}^{*(2)} \ln u_{2n_2} - \frac{1}{N_2} \left(\sum_{n_2=1}^{N_2} \ln \theta_{1n_1n_2}^{*(2)} \right) \left(\sum_{n_2=1}^{N_2} \ln u_{2n_2} \right)$$

$$A_{2N_2}^{(2)} = \frac{1}{N_2} \left(\sum_{n_2=1}^{N_2} (\ln u_{2n_2})^2 \right) \left(\sum_{n_2=1}^{N_2} \ln \theta_{1n_1n_2}^{*(2)} \right) - \frac{1}{N_2} \left(\sum_{n_2=1}^{N_2} \ln u_{2n_2} \right) \left(\sum_{n_2=1}^{N_2} \ln \theta_{1n_1n_2}^{*(2)} \ln u_{2n_2} \right)$$

$$B_{2N_2} = \sum_{n_2=1}^{N_2} (\ln u_{2n_2})^2 - \frac{1}{N_2} \left(\sum_{n_2=1}^{N_2} \ln u_{2n_2} \right)^2$$



Two stage identification and it's applications

- Direct approach

The model:

$$\bar{y} = \Phi(u_1, u_2, \theta_2) = \theta_2^{(3)} u_2^{\theta_2^{(2)}} u_1^{\theta_2^{(1)}},$$

Performance index:

$$\begin{aligned} Q_{N_1 N_2}(\theta_2) &= \sum_{n_2=1}^{N_2} \sum_{n_1=1}^{N_1} \left(\ln y_{n_1 n_2} - \ln \left(\theta_2^{(3)} u_{2n_2}^{\theta_2^{(2)}} u_{1n_1 n_2}^{\theta_2^{(1)}} \right) \right)^2 \\ &= \sum_{n_2=1}^{N_2} \sum_{n_1=1}^{N_1} \left(\ln y_{n_1 n_2} - \ln \theta_2^{(3)} - \theta_2^{(2)} \ln u_{2n_2} - \theta_2^{(1)} \ln u_{1n_1 n_2} \right)^2 \end{aligned}$$



Two stage identification and it's applications

- Direct approach

Identification algorithm:

$$\tilde{\theta}_{2N_1N_2}^* = \begin{bmatrix} \tilde{\theta}_{2N_1N_2}^{*(1)} \\ \tilde{\theta}_{2N_1N_2}^{*(2)} \\ \tilde{\theta}_{2N_1N_2}^{*(3)} \end{bmatrix} = \begin{bmatrix} A_{N_1N_2}^{(1)} \\ A_{N_1N_2}^{(2)} \\ \exp A_{N_1N_2}^{(3)} \end{bmatrix}$$

$$A_{N_1N_2} \stackrel{\text{df}}{=} \begin{bmatrix} A_{N_1N_2}^{(1)} \\ A_{N_1N_2}^{(2)} \\ A_{N_1N_2}^{(3)} \end{bmatrix} = M_{N_1N_2}^{-1} b_{N_1N_2}$$

$$M_{N_1N_2} = \sum_{n_2=1}^{N_2} \sum_{n_1=1}^{N_1} \begin{bmatrix} \ln u_{1n_1n_2} \\ \ln u_{2n_2} \\ 1 \end{bmatrix} \begin{bmatrix} \ln u_{1n_1n_2} & \ln u_{2n_2} & 1 \end{bmatrix} \quad b_{N_1N_2} = \sum_{n_2=1}^{N_2} \sum_{n_1=1}^{N_1} \begin{bmatrix} \ln u_{1n_1n_2} \\ \ln u_{2n_2} \\ 1 \end{bmatrix} \ln y_{n_1n_2}$$







Two stage identification and it's applications

- Direct approach

Approach	θ_2	$\theta_2^{(1)}$	$\theta_2^{(2)}$	$\theta_2^{(3)}$	$Q_{N_1 N_2}(\theta_2)$
Two-stage	$\theta_2 = \theta_{2N_2}^*$	-0,236	1,624	0,043	1,053014
Direct	$\theta_2 = \tilde{\theta}_{2N_1 N_2}^*$	-0,237	1,826	0,029	1,016943



Two stage identification and it's applications

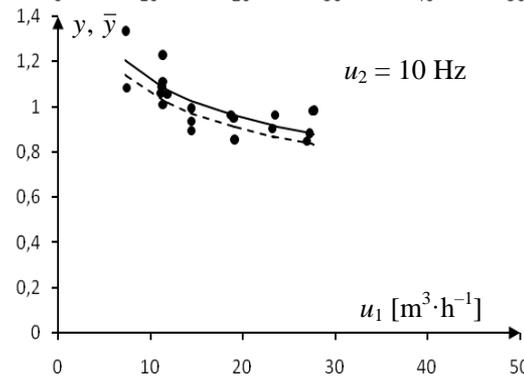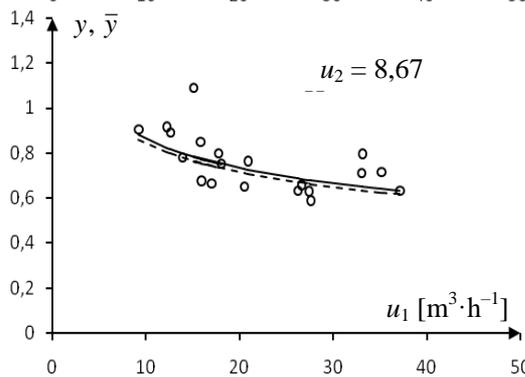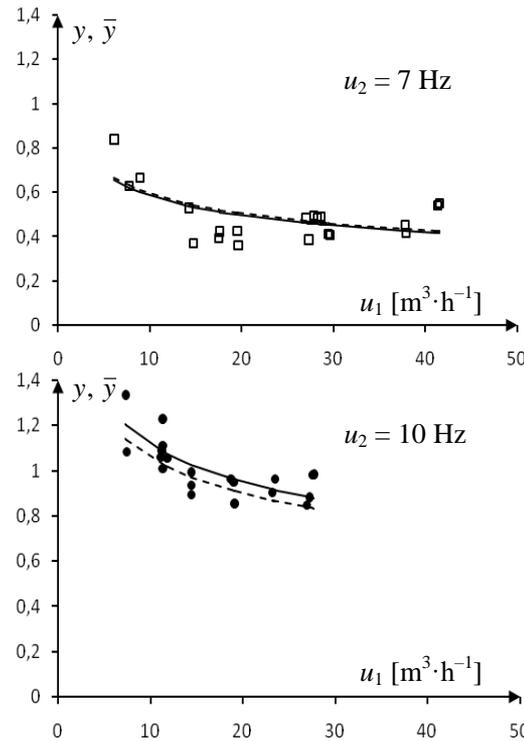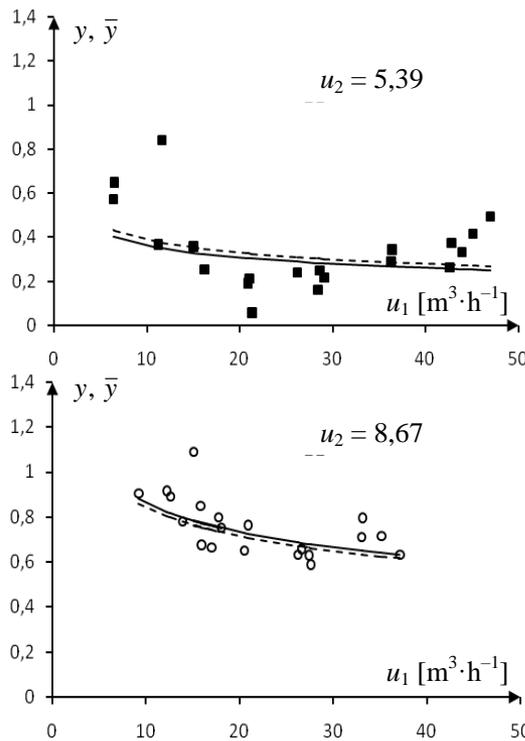



Final remarks

- Identification of complex systems
- Identification with restricted measurement possibilities
- Local and global identification
- Globally optimal model with respect local quality



References

- Bubnicki Z., *Identification of Control Plants*, Oxford, N. York, Elsevier, 1980.
- Bubnicki Z. *Optimisation problems in large-scale systems modelling and identification*, In: Straszak A. Ed. *Large Scale Systems: Theory and Applications*, Pergamon Press, Oxford 1984, pp. 411-416.
- Bubnicki Z., *Global modelling and identification of complex systems*, Proc of 7th IFAC/IFORS Symp. *Identification and System Parameter estimation*, Pergamon Press, Oxford 1985, pp. 261-263
- Swiatek J., *Identification*, Problems of Computer Science and Robotics. Grzech A., editor, Zakład Narodowy im Ossolińskich – Wydawnictwo PAN, Wrocław, 1998. (in polish), 29-44.
- Drałus G., Swiatek J., *Global modeling of complex systems by neural networks*, Proc. of 7th International Symposium on Artificial Life and Robotics, Oita, Japan, 2002. 618-621.
- Swiatek J.: *Global and Local Modeling of Complex Input-Output Systems*. Proc of 16th International Conf. on Systems Engineering, Coventry University England 2003, 669-671.
- Swiatek J.: *Global Identification of Complex Systems with Cascade Structure*, Proc. of the 7th International Conf. on Artificial Intelligence and Soft Computing, Zakopane, 2004. 990-995.
- Swiatek J., *Identification of Complexes of Operations System with Limited Measurement Possibilities*, Proc. of 18th International Conference on Systems Engineering, Las Vegas 2005, 124-129.
- Swiatek J.: *Selected Problems of the Static Complex Systems Identification*, Oficyna Wydawnicza Politechniki Wrocławskiej, Wrocław 2009.



Thank you for attention

